



# TW025A26

Courbe de réponse axe/30°/60° @ 2.83V

Waterfall

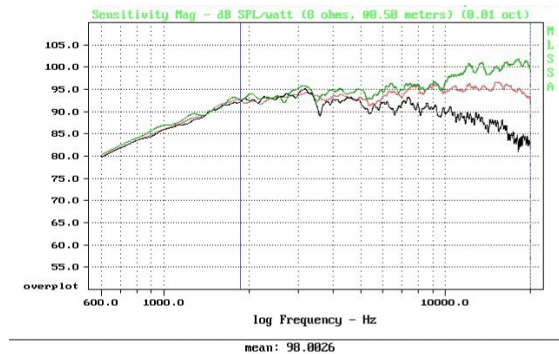


DUMP comment: TW025A26 102687X AXIS\*30°\*60°

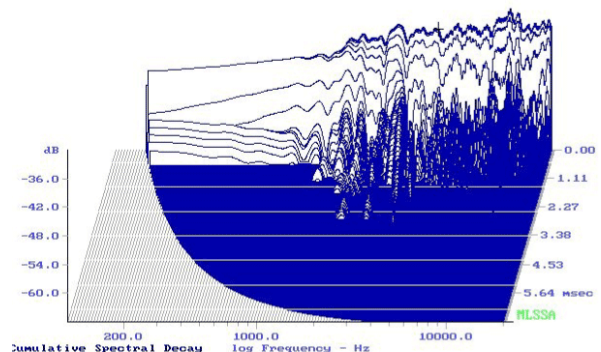

-40.81 dB, 5076 Hz (1102), 0.808 msec (1)

## Impédance

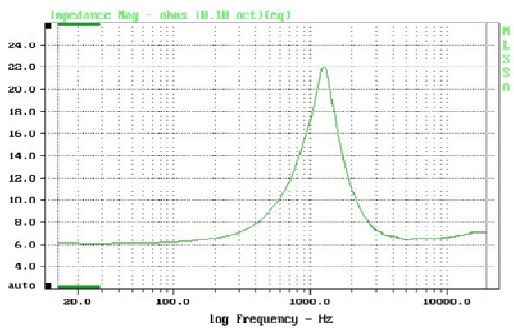

DUMP comment: TW025A26 8Ω 102687X

## Paramètres de Thiele & Small

MLSSA SP0 4MA #901215-1353-3640							
Measured Parameters				QC Limits			
Line	Parameter	Value	Units	Nominal	Min	Max	Result
1	RMSE-free	0.82	Ohms	0.82	0.00	0.00	
2	Fs	1126.02	Hz	1126.02	0.00	0.00	
3	Re	6.11	Ohms[dc]	6.11	0.00	0.00	
4	Res	17.17	Ohms	17.17	0.00	0.00	
5	Qms	1.52		1.52	0.00	0.00	
6	Qes	0.54		0.54	0.00	0.00	
7	Qts	0.40		0.40	0.00	0.00	
8	L1	-0.01	mH	-0.01	0.00	0.00	
9	L2	0.09	mH	0.09	0.00	0.00	
10	R2	-20.00	Ohms	-20.00	0.00	0.00	
11	RMSE-load	0.82	Ohms	0.82	0.00	0.00	
12	Vas(Sd)	--	liters	0.00	0.00	0.00	
13	Mms	--	grams	0.00	0.00	0.00	
14	Cms	--	µN/Newton	0.00	0.00	0.00	
15	B1	--	Tesla-H	0.00	0.00	0.00	
16	SPLref(Sd)	--	dB[Re]	0.00	0.00	0.00	
17	Sub-index	0.02		0.02	0.00	0.00	

Method: Mass-loaded (3.000 grams) Area (Sd): 4.91 sq cm  
DCR mode: Measure (-0.33 ohms) QC file: CLOSED

DUMP title: TW025A26 8 ohms 102687X

## THD+Harmonique distortion @8V

