



TW025A20


Courbe de réponse axe/30°/60°

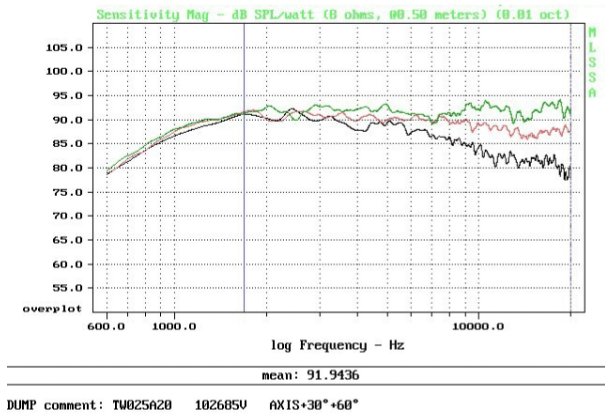

Waterfall

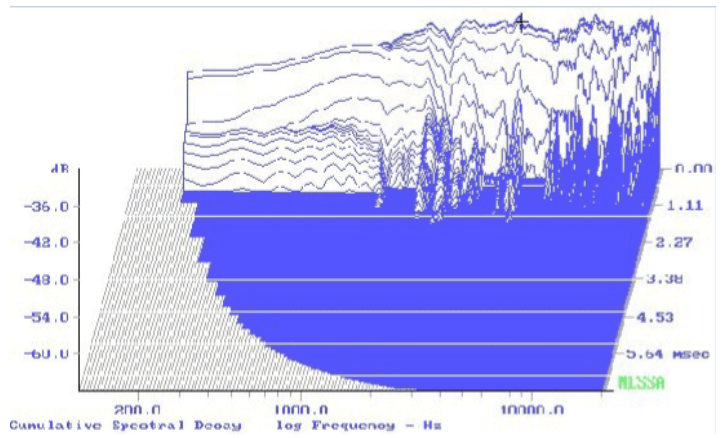

Impédance

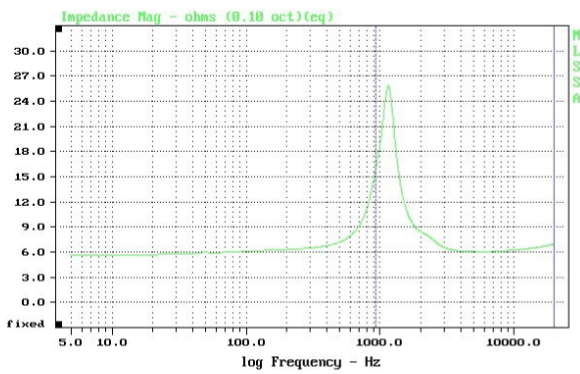

DUMP comment: TW025A20 102685U

Paramètres de Thiele & Small

MLSSA SPO 4W Rev 2 #981215-1353-3640

Line	Parameter	Value	Units	Nominal	Min	Max	Result
1	RMSE-free	0.41	Ohms	0.41	0.00	0.00	
2	Fs	1137.25	Hz	1137.25	0.00	0.00	
3	Re	5.50	Ohms[dc]	5.50	0.00	0.00	
4	Res	19.79	Ohms	19.79	0.00	0.00	
5	Qms	3.47		3.47	0.00	0.00	
6	Qes	0.96		0.96	0.00	0.00	
7	Qts	0.76		0.76	0.00	0.00	
8	L1	0.04	mH	0.04	0.00	0.00	
9	L2	-0.02	mH	-0.02	0.00	0.00	
10	R2	2.35	Ohms	2.35	0.00	0.00	
11	RMSE-load	0.36	Ohms	0.36	0.00	0.00	
12	Vas(Sd)	--	liters	0.00	0.00	0.00	
13	Mms	--	grams	0.00	0.00	0.00	
14	Cms	--	µM/Newton	0.00	0.00	0.00	
15	B1	--	Tesla-H	0.00	0.00	0.00	
16	SPLref (Sd)	--	dB[Re]	0.00	0.00	0.00	
17	Rub-index	0.01		0.01	0.00	0.00	

Method: Mass-loaded (0.40 grams) Area (Sd): 4.91 sq cm
DCR mode: Measure (-0.15 ohms) QC file: CLOSED

DUMP title: TW025A20 102685U

Distorsion @ 1W

TW025A20 102685V THD 1W

